



PG/PBN Element Guide

Element Properties

- Operates up to 1200°C (can operate at higher temperature for short periods of time, max 1500°C)
- Chemically inert to corrosive gasses, liquids & most molten metals
- Electrical isolation due to PBN layer
- High thermal shock resistance
- High uniformity of heating face
- High durability & thermal conductivity (1.6W/m-c)
- Fast ramp rates
- Low mass resulting in fast response (1.90-2.05 g/cc)
- Low outgassing making suitable for UHV



PG/PBN Specification

PG (Pyrolytic Graphite) and PBN (Pyrolytic Boron Nitride) combine through the process of high temperature CVD manufacturing to form a ceramic heating element capable of incredibly high thermal performance and stability.

An element path is machined into the PG layer to produce the element track and power connections prior to coating with PBN to insulate the PG Layer. Areas of exposed PG are left surrounding through holes for power connections which are typically located outside of the desired hot zone to give a better thermal uniformity or for compact areas can be located within the hot zone. Suitable for use in UHV, High Vacuum up to 1600°C and in air up to 500°C (exposed graphite pads will oxidise above this). PBN will start to oxidise at 500°C.

Applications

PG/PBN Elements have a wide range of applications. PBN products are well suited for use in Molecular Beam Epitaxy, Metal Organic Chemical Vapour Deposition (MOCVD), Crystal Growth and many other similar applications where high purity and chemical stability are required. PB/PBN elements are well suited for vacuum environments or in highly corrosive environments due to it being chemically inert to most gasses, liquids and molten metals.

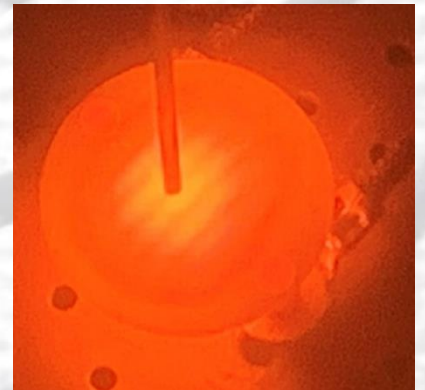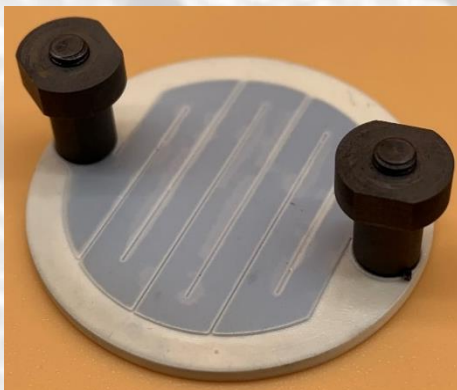

Thermic Edge offers a range of standard PB/PBN heaters along with custom sizes/designs to suit customer specifications, for more information contact our sales team to discuss your requirements in more details.






PG/PBN Heating Element Sizes

Thermic Edge offers a wide range of standard PG/PBN elements ranging from 0.5" to 4" circular elements and up to 2" circular with tabs along with 1" to 3" rectangular heating elements. Thermic Edge is also able to offer a variety of non-standard elements as well as bespoke elements to suit your requirements.

Part No.	Heated Dia.	Resistance* (Ω)	Estimated Power** (W)
PCPBNR10	1"	10-15	450
	25.4mm		
PCPBNR20	2"	10-15	1800
	50.8mm		
PCPBNR30	3"	10-15	4600
	75mm		

Part No.	Heated Dia.	Resistance* (Ω)	Estimated Power** (W)
PCPBNP05	0.5"	10-15	180
	12.7mm		
PCPBNP07	0.75"	10-15	270
	19.0mm		
PCPBNP10	1"	10-15	450
	25.4mm		
PCPBNP17	1.75"	10-15	1300
	44.5mm		
PCPBNP20	2"	10-15	1800
	50.8mm		

Part No.	Heated Dia.	Resistance* (Ω)	Estimated Power** (W)
PCPBNC05	0.5"	9.6-14.4	180
	12.7mm		
PCPBNC10	1"	10-15	450
	25.4mm		
PCPBNC15	1.5"	10-15	1050
	38.1mm		
PCPBNC17	1.75"	10-15	1300
	44.5mm		
PCPBNC20	2"	10-15	1800
	50.8mm		
PCPBNC30	3"	15-30	4600
	72mm		
PCPBNC35	3.5"	15-30	5800
	88.9mm		
PCPBNC40	4"	31.5-38.5	7200
	102mm		

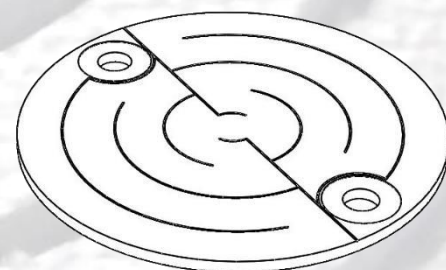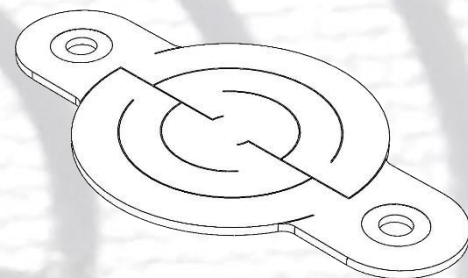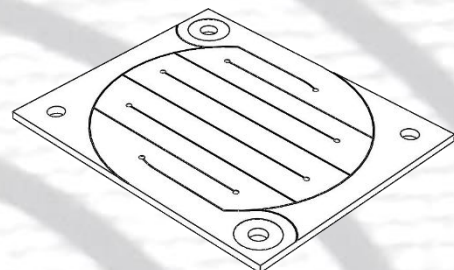


*Resistance at room temp.

** Estimated Power for unshielded element at 1000°C.

*** All Elements 1.3mm +/-0.3 unless otherwise specified



Part No.	Heated Area (mm)	Size (mm)	Thickness (mm)	Resistance* (Ω)	Estimated Power** (W)
PCPBNS01	$\varnothing 9$	$\varnothing 18$	1.1	10-14	90
PCPBNS02	10x10	20x15.5	1.5	5-10	172
PCPBNS03	10x10	20x15	1	18-22	82
PCPBNS04	16x12	16x12	2	5-10	100
PCPBNS05	$\varnothing 16.6$	30x25	1	13-22	313
PCPBNS06	$\varnothing 22$	30x25	1	13-22	275
PCPBNS07	24x15	24x15	2	27-33	306
PCPBNS08	$\varnothing 38$	$\varnothing 50$	1.5	15-20	400

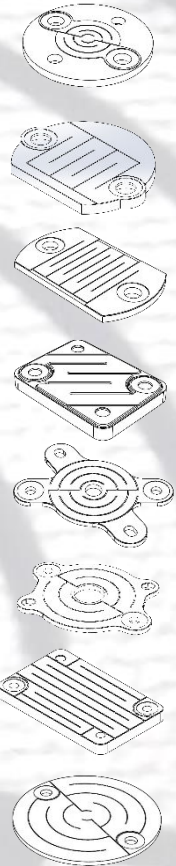

Accessories

Thermic Edge also offers a range of accessories for PG/PBN heaters to allow for electrical connections.

- Power Leg Screws in the following materials:
 - Graphite – Round head M2, M2.5, M3, M4 & M5
 - Ceramic – Round Head M2, M2.5, M3, M4 & M5
 - Ceramic – Countersunk Head M2.5, M3, M4 & M5 (counter sunk elements available upon request)
- Graphite Power Legs in a range of lengths and thread combinations.
- Graphite Nuts M2, M2.5, M3, M4 & M5, 3mm thick.
- Graphoil contact washers 0.5mm thick to suit above screw sizes.
- Pure Nickel Ring crimp terminals to suit above leg sizes.

